

+

09/21/98
JCS98 U.S. P.O.

UTILITY PATENT APPLICATION TRANSMITTAL

Only for new nonprovisional applications under 37 CFR 1.53(b)

Attorney Docket No.

35.C12973

First Named Inventor or Application Identifier

TADAYOSHI INAMOTO, ET AL.

Express Mail Label No.

09/21/98
JCS98 U.S. P.O.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages

3. ☒ Drawing(s) (35 USC 113) Total Sheets

4. ☒ Oath or Declaration Total Pages

a. ☐ Newly executed (original or copy)

b. ☒ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
(Note Box 5 below)

i. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting inventor(s) named in
the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the oath or
declaration is supplied under Box 4c, is considered as being part of the disclosure of
the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & documents)

9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514
(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	13-20 -	0	X \$ 22.00 -	\$ 0.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	2-3 -	0	X \$ 82.00 -	\$ 0.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$270.00 -	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 790.00
			Total of above Calculations -		\$ 790.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL -				\$ 790.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 790.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Jean K. Dudek, Reg. No. 30,938
SIGNATURE	
DATE	September 21, 1998

RECORDING MEDIUM, IMAGE FORMING PROCESS USING
THE SAME, AND PROCESS FOR THE PREPARATION OF THE SAME

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to a recording medium
for image formation by an ink-jet recording system, and
more particularly to a recording medium suitable for use
in a credit card, a bank card, a prepaid card, or the
10 like, an image forming process using the recording medium,
and a process for the preparation of the recording medium.

Related Background Art

Conventional card, such as credit card, bank card,
prepaid card, etc. contain various information therein.
15 Such information are recorded for example by digitizing
the information and recording such information by magnetic
recording, or in the form of a bar code, or by so-called
optical recording with a laser beam to ablate a part of
the optical recording layer or to generate a change in the
20 reflectance thereof or a deformation therein, on a record
bearing member, wherein the recording and reproduction of
information are achieved by the difference in the optical
reflectance or transmittance. There are also utilized an
embossing method in which characters and numerals are
25 represented by a protruding part of a card deformed
unevenly, and ordinary printing methods such as screen
printing or offset printing.

However, the recorded data cannot be read with the human eyes in case of magnetic recording, bar code recording or optical recording of the digitized information. It is therefore not easy to confirm whether the information recorded on the card actually belongs to the holder of the card.

Also, the printing of character information indicating the cautions or regulations for the use of the card and that of logo, background pattern or picture are executed in advance by ordinary printing method such as screen printing or offset printing. In such printing, however, there are required printing plates corresponding to the number of colors to be printed, and such printing plates cannot be prepared within a short time and become expensive in a case of small number of cards to be printed. For this reason, such printing is limited to general information common to a large number of cards, and individual information is currently recorded separately in the form of digital data explained above.

The embossing method, which expresses characters or numerals by means of protruding portions of a card deformed unevenly, allows visual confirmation, but is associated with drawbacks that the amount of information is limited and that such characters or numerals cannot be easily colored. Besides, there is also a drawback that, as such embossing is obtained by deforming the card, the recording area for magnetic or optical recording cannot be

provided on such embossed area.

Recording of individual information, such as a photograph of a face of the card owner, is already adopted in a part of the cards.

5 However, for example in a method of adhering a photograph itself onto the card, the card preparation within a short time is difficult. There is also a problems in a method of printing the photograph directly on the card that the information recording medium may be
10 affected by a surface treatment or printing. Also, a sublimation transfer printing method is associated a drawback of a high running cost because the ink ribbon is expensive. Further, there has to be selected a base material of satisfactory printability.

15 For resolving these drawbacks, there has been disclosed a card in which an ink-receiving layer is laminated on a card substrate and on which information is recorded by an ink-jet recording system.

 Japanese Patent Application Laid-Open No. 57-784
20 discloses a card provided, on a card medium, with an ink-receiving layer and further with an ink permeable slidable layer thereon.

 However, such medium is defective in safety and in ecology, since the coating liquid contains organic
25 solvent. Also, such the medium is difficult applicable in practical use, because, in a case of using such structure to a polyvinyl chloride substrate ordinarily employed in

credit cards, bank cards, etc., the substrate itself is eroded by the solvent to result in a curvature of the card or a cracking of the coated layer.

Japanese Patent Application Laid-Open No. 64-43826
5 discloses a card in which an ink-receiving layer is laminated on a card substrate and information is recorded by an ink-jet recording system, but water-fastness and durability of the ink-receiving layer seem to be insufficient.

10 Japanese Patent Publication No. 3-24906 discloses an ink-receiving layer containing cationic hydrated aluminum oxide, and Japanese Patent Application Laid-Open No. 4-37577 discloses an ink-receiving layer containing alumina hydrate.

15 Japanese Patent Publication No. 2-31673 discloses an ink jet recording medium in which an inorganic pigment layer of high ink absorbability is provided on a substrate and further an outermost fine particle layer of thermoplastic organic polymer is laminated subsequently.

20 Also, Japanese Patent Application Laid-Open No. 7-237348 discloses an ink-jet recording sheet in which a porous layer of alumina hydrate is provided on a substrate and an outermost porous polymer layer is laminated thereon.

Furthermore, Japanese Patent Application Laid-Open No. 8-
25 2090 discloses a similar card-shaped ink-jet recording medium.

In these media, the outermost porous resin layer is

made non-porous by thermal treatment after ink-jet recording has been conducted. Stated differently, the image formation or absorption and fixation of ink are effected in the inorganic pigment layer composed for example of porous alumina hydrate, and water fastness and durability are achieved by the porous resin layer which has been rendered non-porous.

However, the inorganic pigment layer composed for example of porous alumina hydrate is insufficient in flexibility, and, when such layer is applied to the substrate for example of polyvinyl chloride mentioned above, there will result a drawback that the ink-receiving layer is peeled off by the deformation in embossing. Also, in case of an ink-jet recording system employing a pigment as the coloring material of the ink, the pigment particles constituting the coloring material do not intrude into the ink-receiving layer to result in insufficient friction resistance of the obtained image. Furthermore, as polyvinyl chloride has a softening temperature as low as 60°C to 80°C, there has not been disclosed any effective method for preventing the deformation of the substrate at the heat treatment for preparing the recording medium or for rendering the outermost porous resin layer non-porous.

SUMMARY OF THE INVENTION

An object of the present invention is to provide an

excellent recording medium causing no deformation.

Another object of the present invention is to provide an image forming process for forming an image by a simple way on the above-mentioned recording medium.

5 Further, still another object of the present invention is to provide a process for the preparation of a recording medium causing no deformation.

The above objects can be achieved by the present invention described below.

10 According to the present invention there is provided a recording medium provided with an ink-receiving layer on at least one surface of a substrate, wherein the ink-receiving layer is a porous layer comprising pigment particles and mutually fused thermoplastic resin
15 particles.

According to the present invention there is also provided an image forming process comprising the step of forming an image by ejecting an ink by an ink-jet recording method onto the above-mentioned recording
20 medium.

According to the present invention there is still provided a process for the preparation of a recording medium comprising the steps of applying to a substrate a coating liquid comprising pigment particles and
25 thermoplastic resin particles and forming an ink-receiving layer by fuse-gathering the thermoplastic resin with heat under pressure.

According to the present invention there is further provided a process for the preparation of a recording medium comprising the steps of applying to a substrate a coating liquid comprising pigment particles and
5 thermoplastic resin particles; and forming an ink-receiving layer by fusing and adhering the thermoplastic resin with heat under pressure.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Fig. 1 is a schematic cross-sectional view showing an example of the recording medium of the present invention.

Fig. 2 is a schematic cross-sectional view showing another example of the recording medium of the present invention.


15

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Now, the present invention will be described in detail with reference to Figs. 1 and 2.

As the substrate 1 of the present invention, it is
20 preferable to use a water-fast substrate. If not so, a durable recorded image cannot be obtained due to moisture intrusion from the side of the substrate 1, even when a highly water-fast ink-receiving layer 2 is provided on a recording surface. The preferred examples of the
25 substrate 1 include polyester resins such as polyethylene terephthalate, polybutylene terephthalate, a terephthalic acid-ethylene glycol-cyclohexane dimethanol copolymer of

the formula

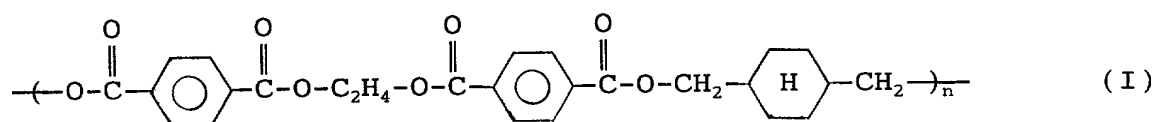

5 and the like, polyvinyl chloride resin, polyvinylidene chloride resin, epoxy resin, polycarbonate resin, polyethylene resin, polypropylene resin, polystyrene resin, vinyl chloride copolymers, vinyl acetate copolymers, polycarbonate, acrylonitrile-butadiene-styrene
10 resin, a polymer alloy prepared by mixing the copolymer of the formula (I) with a polycarbonate, and the like, and metals for certain applications. In consideration of close adhesion with the thermoplastic resin particles in the ink-receiving layer, preferred are polyvinyl chloride
15 resin, polyvinylidene chloride resin, polycarbonate resin and polystyrene resin.

On a surface of the substrate 1 or on both surfaces thereof, there may be in advance formed a magnetic stripe for digital information recording, photomagnetic recording
20 layer, IC and the like, or there may be in advance printed predetermined information such as a logo, cautions for use or regulations, for example by screen printing or offset printing. Namely, in the present invention there may be provided portions where various information are recorded,
25 in addition to the ink-receiving layer 2. A thickness of the substrate 1 of the present invention is preferably within a range of from 0.2 to 1.0 mm, because deformation

is difficult to occur.

An ink-receiving layer 2 may be provided on both surfaces of the substrate 1 and ink-jet recording may be conducted on both surfaces, or the ink-receiving layer 2
5 may be provided on either surface of the substrate 1. However, in case of an optical card, the ink-receiving layer is provided on a surface opposite to the surface used for recording and reproduction of optical information.

10 The recording medium of the present invention is preferably in the form of a rectangle or a circle, the length of a side or a diameter of which is from 30 to 130 mm, respectively, from the view point of difficulty of deformation and easiness of handling.

15 The substrate 1, to which an ink-receiving layer 2 is applied, may be prepared in advance in the final form, or may be formed into the final form, after the ink-receiving layer has been provided.

As the pigment particles in the ink-receiving layer
20 2, for example, silica gel, alumina hydrate, titanium oxide, calcium silicate, synthetic zeolite, zinc oxide, plastic pigment and the like may be used. The average particle size of the pigment particles is preferably in a range of from 0.01 to 5 μm .

25 As the thermoplastic resin particles in the ink-receiving layer, for example, particles of polyvinyl chloride, polyvinyl acetate, polyacrylate ester,

polystyrene, polyethylene and the like may be used. There can also be employed particles of copolymers of corresponding monomers. The average particle size of such thermoplastic resin particles is preferably in a range of
5 from 0.1 to 3 μm , more preferably from 0.2 to 2 μm . In the ink-receiving layer 2 there is contained mutually fused thermoplastic resin particles.

The thermoplastic resin particles are used for fixing the pigment by fusion and for realizing adhesion with the
10 substrate 1. For this reason, there is used preferably a material capable of being fused and adhering closed to the substrate by heating. In case a pigment is employed as the coloring material of the ink, there is achieved improvement in the friction resistance, namely absence of
15 detachment of the coloring material by friction. The mechanism for improvement of the friction resistance is not yet clarified, but is presumably because of a fact that the thermoplastic resin particles are deformed by fusion to form large gaps, thereby facilitating intrusion
20 of the pigment particles. However, an excessively large amount of the thermoplastic resin particles reduces the amount of gaps, whereby the ink absorbability is deteriorated and a recording medium with satisfactory print quality cannot be obtained.

25 For attaining the above-mentioned objects, the ratio of the pigment particles to the thermoplastic resin particles in the ink-receiving layer 2 is desirably

selected in such a manner that the thermoplastic resin is used in a range of from 1 to 40 parts by weight, preferably from 3 to 20 parts by weight, per 100 parts by weight of the pigment.

5 If necessary, the ink-receiving layer 2 may further contain a water-soluble polymer as binder resin. For example there may be employed polyvinyl alcohol or modified products thereof, starch or modified products thereof, gelatin or modified products thereof, casein or
10 modified products thereof, gum arabic, a cellulose derivative such as carboxymethyl cellulose, hydroxyethyl cellulose and hydroxypropyl cellulose, or polyvinyl pyrrolidone. The ratio of the pigment particles to the binder is such that the binder is preferably used 40 parts
15 by weight or less, more preferably 15 parts by weight or less, per 100 parts by weight of the pigment. The binder, if used in excess of the above-mentioned range, will block the gaps between the pigment particles, thereby deteriorating the ink absorbability.

20 If necessary, there may further be suitably added a pigment dispersant, a thickener, a defoamer, a foam suppressor, a fluorescent whitening agent, an ultraviolet absorber, an antioxidant, an antimold agent, etc.

 In applying these materials to the substrate, the
25 polymer component is dispersed or dissolved in a suitable solvent, and the pigment component is dispersed as fine as possible to obtain a coating liquid. Otherwise, the

powder materials are mixed well and molded together with the substrate in a mold.

Most preferably, these materials are used as a dispersion in a solvent principally composed of water.

5 In a case that these materials are in the form of a dispersion, the ink-receiving layer may be applied onto the substrate by various coating methods such as screen printing, blade coating, air-knife coating, roll coating, curtain coating, bar coating, spray coating and the like.

10 The coating weight, calculated as solid after drying, is within a range of from 3 to 80 g/m², preferably from 5 to 40 g/m². A coating weight less than 3 g/m² cannot provide sufficient ink absorbability, so that satisfactory image cannot be obtained. A coating weight larger than 80
15 g/m² cannot be obtained with a single coating operation and plural coating operations are required, which is disadvantageous in cost.

The wet coated substrate is subsequently dried in a dry air oven or with a heated drum. In a case that the
20 substrate is composed of a material having a low softening temperature such as polyvinyl chloride resin, a drying temperature of from 60°C to 70°C is the highest limit for not causing deformation of the substrate.

Finally, according to the present invention, a heat
25 treatment is thereafter executed in order to fuse the thermoplastic resin particles. The temperature of heat treatment is preferably within a range of from about 70 to

about 180°C, though it cannot be said in general, because it varies depending on a substrate and a kind of thermoplastic resin particles. The temperature of such heat treatment is higher than the fusing and adhering temperature of the thermoplastic resin particles. The above-mentioned fusing and adhering temperature corresponds to the film forming temperature in case of emulsion or the molding temperature in case of molding resin. In a case that the substrate is a material having a low softening temperature such as polyvinyl chloride resin mentioned above, the substrate may be deformed with a fusing and adhering temperature higher than 60°C. Therefore, according to the present invention, such substrate is heated under constraint by pressure, which is one of the feature of the present invention. The pressurization is preferably made with a flat material such as a ferrotype plate and an iron plate with chrome plating, since otherwise the surface pattern of the pressing material is transferred onto the substrate or the ink-receiving layer. However, if a particular surface shape such as matted surface is desired, the pressurization may be made with the material of corresponding surfacial shape. As to a pressing material, there may be used a plastic plate, a ceramic plate or a glass plate in addition to a metal plate such as a ferrotype plate. The pressure to be applied is determined depending on the materials constituting the substrate and

the ink-receiving layer, but it is preferably within a range of from 0.01 to 20 kg/cm², more preferably within a range of from 0.01 to 15 kg/cm², in particular within a range of from 0.01 to 5 kg/cm².

5 An excessively low pressure cannot provide sufficient adhesion close to the substrate, while an excessively high pressure crushes the substrate or blocks the gaps in the ink-receiving layer. The heating time is preferably from 5 to 10 minutes. After treatment, the substrate is cooled
10 to room temperature under pressure.

 In a more preferred embodiment of the recording medium of the present invention, an outermost layer 3 composed of a porous layer containing thermoplastic resin particles is provided on the ink-receiving layer 2.

15 The thermoplastic resin particles employed in the outermost layer 3 may be composed, for example, of particles of polyvinyl chloride, polyvinyl acetate, polyacrylate ester, polystyrene, polyethylene, etc. mentioned in the foregoing. There may also be employed
20 particles of copolymers of monomers corresponding to these.

 The average particle size of the thermoplastic resin particles employed in the present invention is preferably within a range of from 0.1 to 3 μm, more preferably from
25 0.2 to 2 μm and most preferably from 0.2 to 0.8 μm.

 An average particle size of the thermoplastic resin particles not more than 0.1 μm reduces the absolute pore

volume of the outermost layer, thereby deteriorating the ink absorbability and the image quality. On the contrary, if the average particle size exceeds 5 μm , the surface smoothing becomes difficult or the surface luster is lowered in a case of rendering the surface non-porous after the printing operation.

Such porous layer containing the thermoplastic resin particles is formed by applying a coating liquid, with a solid content of the thermoplastic resin particles within a range of from 10 to 50 % by weight, as the outermost layer on the ink-receiving layer provided in advance.

The thermoplastic resin particles have to be applied with such a thickness as to suppress the generation of interference light and to sufficiently function as a protective layer, and the outermost layer is preferably so applied as to obtain a dry thickness of from 2 to 10 μm .

As the ink for effecting ink-jet recording on the above-described recording medium, any known ink can be used without any problem. Also, the coloring material can be a water-soluble dye such as direct dyes, acid dyes, basic dyes, reactive dyes or food dyes, or a dispersible dye or a pigment, and these materials can be used without any limitation. If emphasis is given to the weather fastness of the coloring material, there is advantageously employed a pigment dispersion. These coloring materials are generally used in a range of from 0.1 to 20 % by weight in the conventional ink, and also in the present

invention the same range may be used.

The solvent used in the aqueous ink employed in the present invention is water, or a mixture of water and a water-soluble organic solvent, preferably a mixture of
5 water and a water-soluble organic solvent containing polyvalent alcohol having an effect for preventing ink drying.

The ink-jet recording method for forming a record by applying such ink onto the above-described recording
10 medium can be any method capable of effectively dispatching the ink from the nozzle, thereby depositing the ink onto the recording medium present in the flying stroke. In particular, there can be effectively employed the ink-jet method disclosed in Japanese Patent
15 Application Laid-Open No. 54-59936 in which the ink generates a rapid volume change under the function of thermal energy and is discharged from the nozzle by a force generated by such state change.

As the image immediately after the printing contains
20 water and/or water-soluble organic solvent employed as solvent in the ink, and then such water and/or solvent is preferably removed. Such removal can be achieved by heating, pressure reduction, blowing of drying gas or a combination thereof.

25 In a case that there is the outermost layer 3, the recording medium of the present invention is heated after forming an image, so that the porous outermost layer 3 is

made non-porous.

A method for making the outermost layer non-porous is preferably a heating treatment, and such treatment improves the weather fastness such as water fastness and light fastness, provides luster to the image and enables prolonged storage of the print. According to the present invention, as the underlying ink-receiving layer also contains thermoplastic resin, the fusion and adhesion with such resin achieves securer adhesion close to the outermost layer, thereby improving the durability of the recording medium, so that it can be applied to severe conditions of use such as an information recording medium.

Temperature of such the heating treatment is preferably within a range of from 70°C to 180°C, though variable in relation to the heating time, in consideration of the influence on the materials such as the substrate, ink-receiving layer and ink, and of the surface character after the treatment.

As explained in the foregoing, the substrate starts to deform when the heating temperature exceeds 60°C to 80°C, in a case that the substrate is composed of a material of a low softening temperature such as polyvinyl chloride resin. In the present invention, therefore, in case of employing such substrate, the recording medium is not heated entirely, but the surfacial portion alone is irradiated in non-contact manner with heating radiation such as infrared light, whereby the outermost layer and

the adjacent surfacial portion of the ink-receiving layer alone are heated. Contact of the heat source with the recording medium is not preferred because the surface pattern of the heat source is transferred onto the surface of the thermoplastic resin, thereby deteriorating the luster of the recording medium, and also because the heat transmission to the substrate cannot be controlled.

In the following the present invention will be clarified further by examples thereof, but the present invention is by no means limited by such examples.

The recording on the recording medium was executed by a Canon bubble jet color printer BJC-620JW with the mode for a high-quality exclusive paper.

Example 1

At first, particles aluminum isopropoxide was subjected to hydrolysis/deflocculation to obtain alumina hydrate (sol) of fiber bundle structure as the pigment. Then added were vinyl chloride particles (G-351, trade name, manufactured by Nippon Zeon Co., Ltd.; vinyl chloride latex with a film forming temperature of from 100 to 110°C) as the thermoplastic resin particles. The ratio of the pigment particles to the thermoplastic resin particles was 100:15 by weight. The coating liquid thus obtained was applied to a white hard polyvinyl chloride resin plate, having a dimension of 500 × 500 mm and a thickness of 0.74 mm and having magnetic stripes, on a surface thereof opposite to the magnetic stripes, and the

wet coated plate was dried for 20 minutes at 60°C. The thickness after drying was 40 µm. The resin plate was then sandwiched between flat ferrotype plates heated to 150°C, under a pressure of 0.1 kg/cm² for 5 minutes and gradually cooled to 40°C over 1.5 hour.

Then, the vinyl chloride latex mentioned above was applied thereto by means of a wire bar, so as to provide a dry thickness of 3 µm, and was dried for 15 minutes at 50°C. The resin plate was then punched into a size of 80.6 × 54.0 mm, with rounded corners with a radius of 3.0 mm.

Ink-jet recording was conducted using the recording medium thus prepared by means of the above-mentioned ink-jet printer and with pigment inks described in the following:

Ink compositions:

Black ink:

Carbon black pigment	6 parts by weight
Styrene-acrylic acid copolymer (neutralized with monoethanolamine)	2 parts by weight
Ethylene glycol	25 parts by weight
Diethylene glycol	7 parts by weight
Water	60 parts by weight

Yellow ink:

Benzidine yellow G pigment	4 parts by weight
Styrene-acrylic acid copolymer (neutralized with monoethanolamine)	1.5 parts by weight

Ethylene glycol	25 parts by weight
Diethylene glycol	7 parts by weight
Water	62.5 parts by weight

Magenta ink:

5	Quinachridone pigment	4 parts by weight
	Styrene-acrylic acid copolymer (neutralized with monoethanolamine)	1.5 parts by weight
	Ethylene glycol	25 parts by weight
	Diethylene glycol	7 parts by weight
10	Water	62.5 parts by weight

Cyan ink:

	Copper phthalocyanine blue pigment	4 parts by weight
	Styrene-acrylic acid copolymer (neutralized with monoethanolamine)	1.5 parts by weight
15	Ethylene glycol	25 parts by weight
	Diethylene glycol	7 parts by weight
	Water	62.5 parts by weight

20 The printed polyvinyl chloride sheet was dried by heating for 30 minutes at 60°C to eliminate volatile solvents in the ink.

Then the recording medium was subjected to a heating treatment under conditions that a gap of 0.2 mm was set between the recording medium and a heater having a heating area of 10 mm in width and 200 mm in length and having a surface temperature of 210°C, and a feed rate was set at 0.2 mm/sec, thereby obtaining an image print. The outermost latex layer could be rendered non-porous with

scarce deformation of the recording medium.

The obtained image was clear and the coloring material was stable against rubbing. When the obtained image print was subjected to embossing, no peeling of the ink-receiving layer could be observed. Also after immersion in tap water for 100 hours, there could not be observed peeling of the ink-receiving layer, distortion in the image or loss of the image density. Furthermore, no change in the appearance could be observed after standing in an atmosphere of 40°C and 90 %RH for 50 hours.

Example 2

Image formation was conducted in the same manner as in Example 1, except that the inks were replaced by the following ones. Evaluations in the same manner as in Example 1 provided results similar to those of Example 1.

Dye	5 parts by weight
Ethylene glycol	15 parts by weight
Polyethylene glycol	10 parts by weight
Water	70 parts by weight

Dye used were:

C.I. direct yellow 86 for a yellow ink,
C.I. acid red 35 for a magenta ink,
C.I. direct blue 199 for a cyan ink, and
C.I. food black 2 for a black ink.

Example 3

A card-shaped recording medium was prepared in the same manner as in Example 1, except that the pigment

particles employed in the ink-receiving layer were replaced by colloidal silica (Snowtex ST-N, trade name, manufactured by Nissan Chemical Industries, Co.).

Image formation was conducted on such recording medium with the pigment inks employed in Example 1, and image prints were obtained through a process similar to that in Example 1. The outermost latex layer could be rendered non-porous with scarce deformation of the recording medium.

The obtained image was clear and the coloring material was stable against rubbing. When the obtained image print was subjected to embossing, no peeling of the ink-receiving layer could be observed. Also, after immersion in tap water for 100 hours, there could not be observed peeling of the ink-receiving layer, distortion in the image or loss of the image density.

Example 4

A coating liquid was obtained by adding, to 100 parts by weight (solid) of alumina hydrate employed in Example 1, 10 parts by weight of polyvinyl alcohol (PVA117, trade name, manufactured by Kuraray Co.), 0.5 parts by weight of boric acid (H_3BO_3) and 10 parts by weight of vinyl chloride particles (same as in Example 1). This coating liquid was applied to a plate with magnetic stripes having a dimension of 500 mm width \times 500 mm length \times 0.74 mm thickness made of terephthalic acid-ethylene glycol-cyclohexane dimethanol copolymer (PETG, trade name,

available from Eastman Chemical Co.), on a surface thereof opposite to the magnetic stripes, and the coated plate was dried at 60°C for 20 minutes. The dry thickness was 40 µm. The dried plate was treated for 5 minutes by

5 inserting it between plane ferrotype plates heated to 130°C under pressure of 0.1 Kg/cm², and then gradually cooled to 40°C over 1.5 hour.

The vinyl chloride latex mentioned above was applied thereto so as to provide a dry thickness of 3 µm by means
10 of a wire bar, and dried at 50°C for 15 minutes. Thereafter, the plate was punched out into a size of 80.6 mm × 54.0 mm, with rounded corners with a radius of 3.0 mm.

Image formation was conducted on such recording
15 medium with the pigment inks employed in Example 1, and image prints were obtained through a process similar to that in Example 1. The outermost latex layer could be rendered non-porous with scarce deformation of the recording medium.

20 The obtained image was clear and the coloring material was stable against rubbing. When the obtained image print was subjected to embossing, no peeling of the ink-receiving layer could be observed. Also after immersion in tap water for 100 hours, there could not be
25 observed peeling of the ink-receiving layer, distortion in the image or loss of the image density.

Example 5

A coating liquid was obtained by adding, to 100 parts by weight (solid) of alumina hydrate employed in Example 1, 10 parts by weight of polyvinyl alcohol (PVA117, trade name, manufactured by Kuraray Co.), 0.5 parts by weight of boric acid (H_3BO_3) and 10 parts by weight of vinyl chloride particles (same as in Example 1). Thereafter a process same as in Example 1 was conducted, but the outermost layer was not formed, thereby obtaining a card-shaped recording medium with a single ink-receiving layer.

Image formation was conducted on such recording medium with the pigment inks employed in Example 1.

The obtained image was clear and the coloring material was stable against rubbing. When the obtained image print was subjected to embossing, no peeling of the ink-receiving layer could be observed. Also, after immersion in tap water for 100 hours, there could not be observed peeling of the ink-receiving layer, distortion in the image or loss of the image density. The color hue showed a slight change probably because of absorption of certain water, but the change was in the practically tolerable range. The change disappeared after drying.

Comparative Example 1

A card-shaped recording medium was obtained in the same manner as in Example 1, except that the thermoplastic resin particles were replaced by polyvinyl alcohol particles.

Image formation was conducted on such recording

medium with the pigment inks employed in Example 1. Also, image prints were obtained by rendering the outermost layer non-porous through a process similar to that in Example 1. The recording medium scarcely showed

5 deformation, but the area printed with the pigment ink did not show luster because the outermost latex layer could not be rendered sufficiently non-porous. The image print, when subjected to embossing, showed the peeling of the ink-receiving layer in a part.

10 Comparative Example 2

The procedure of Example 5 was repeated, except that the vinyl chloride particles were not added, and the outermost layer was not provided, thereby obtaining a card-shaped recording medium with a single ink-receiving
15 layer.

Image formation was conducted on such recording medium with the pigment inks employed in Example 1.

The obtained image was clear, but the coloring material was partially lost by rubbing, which indicates
20 that the coloring material was not introduced into the ink-receiving layer. When the obtained image print was subjected to embossing, peeling of the ink-receiving layer could be observed in a part.

As explained in the foregoing, the present invention
25 allows to inexpensively obtain a card-shaped recording medium on which the information of the individual person can be easily and clearly printed by an ink-jet recording

system. Also, the image obtained on the card is stable even after a prolonged standing under environmental conditions of high-temperature and high-humidity.

Furthermore, the surface of the image shows a practically
5 acceptable mechanical strength. Moreover, it is possible
to sue the recording medium concurrently with conventional
magnetic or optical digital recording, screen or offset
printing, or embossing.

WHAT IS CLAIMED IS:

1. A recording medium provided with an ink-receiving layer on at least one surface of a substrate, wherein said ink-receiving layer is composed of a porous layer
5 comprising pigment particles and mutually fused thermoplastic resin particles.

2. The recording medium according to claim 1,
10 wherein a porous outermost layer comprising thermoplastic resin particles is provided on the ink-receiving layer.

3. The recording medium according to claim 2,
wherein said substrate is card-shaped.

15 4. The recording medium according to claim 1,
wherein said pigment particles are composed of alumina hydrate.

5. The recording medium according to claim 1,
20 wherein said substrate is composed of a polyvinyl chloride resin.

6. The recording medium according to claim 1,
wherein said substrate is composed of a polystyrene resin.
25

7. The recording medium according to claim 1,
wherein said substrate is composed of a polycarbonate.

8. The recording medium according to claim 1, wherein the substrate is composed of a terephthalic acid-ethylene glycol-cyclohexane dimethanol copolymer.

5 9. An image forming process comprising the step of forming an image by ejecting an ink by an ink-jet recording method onto the recording medium according to claim 1.

10 10. An image forming process comprising the steps of:
 forming an image by discharging ink by an ink-jet recording method onto the recording medium according to claim 2, and
15 rendering said outermost layer transparent.

11. The image forming process according to claim 9, wherein a coloring material of the ink is a pigment.

20 12. A process for the preparation of a recording medium comprising the steps of:
 applying to a substrate a coating liquid comprising pigment particles and thermoplastic resin particles; and
25 forming an ink-receiving layer by fusing and adhering the thermoplastic resin with heat under pressure.

13. The process for the preparation of a recording medium according to claim 12 comprising further the step of:

forming an outermost layer, after the ink-receiving layer has been provided.

5

ABSTRACT OF THE DISCLOSURE

Provided is a recording medium provided with an ink-receiving layer on at least one surface of a substrate, wherein said ink-receiving layer is composed of a porous layer comprising pigment particles and mutually fused thermoplastic resin particles.

5

FIG. 1


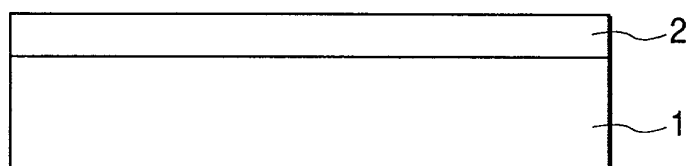


FIG. 2

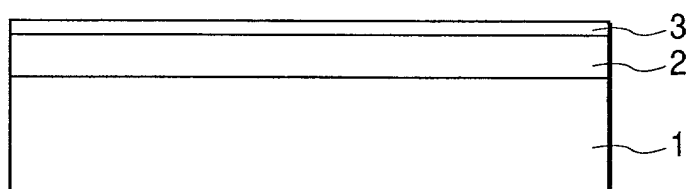

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled RECORDING MEDIUM, IMAGE FORMING PROCESS USING THE SAME, AND PROCESS FOR THE PREPARATION OF THE SAME

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
JAPAN	09-258534	September 24, 1997	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	--

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor TADAYOSHI INAMOTO

Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 13-8-602, Minami Osawa 5-chome, Hachioji-shi, Tokyo, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 2)

Full Name of Second Joint Inventor, if any NOBUYUKI HOSOI

Second Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 1953-3, Oaza Ogoe, Kazo-shi, Saitama-ken, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-
chome, Ohta-ku, Tokyo, Japan

Full Name of Third Joint Inventor, if any KENJI SHINJO

Third Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 7-6-302, Tsuchihashi 2-chome, Miyamae-ku, Kawasaki-shi,
Kanagawa-ken, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-
chome, Ohta-ku, Tokyo, Japan

F502\W165725\JKD\dmh